


Pin & Fork style mounting

90° rotation shown

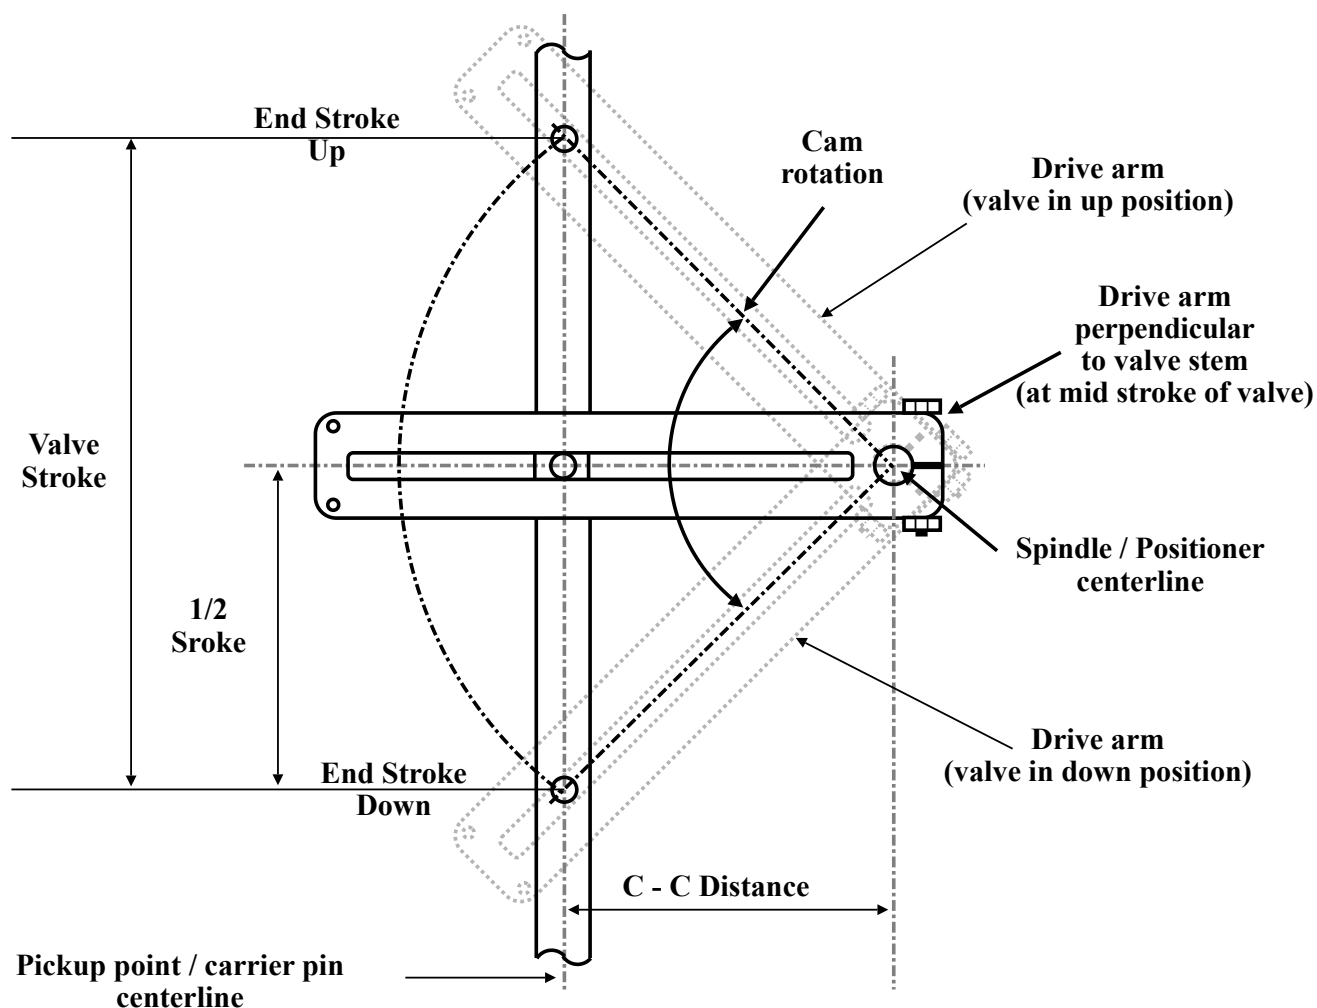

Cam Rotation	C - C Distance Formula
90°	0.50 x Valve Stroke
60°	0.87 x Valve Stroke
45°	1.20 x Valve Stroke
30°	1.87 x Valve Stroke

VAC Drive Arms		Approx. stroke range with 90° CAM
P/N	Description (spindle)	
350013	Linear Knife Gate 15" (D2)	2-3/4" - 25-1/4"
350016	Linear Knife Gate 25" (D2)	2-3/4" - 25-1/4"
350052	9" Holed (D2)	1-1/2" - 9"
350076	6" Slotted (D6)	1" - 6"
350053	6" Slotted (D2)	1" - 6"
350101	Linear Arm, Short (D4)	1" - 4"
350101L	Linear Arm, Long (D4)	1" - 11"



VAC
VALVE ACCESSORIES & CONTROLS, INC.

Title: Linear Mounting Examples and C -C formulas

Author: SK

Date: 7/22/26


Revision:

Sheet: 1 of 2


Turnbuckle style mounting

30° rotation with .75" stroke shown


Valve in Down position

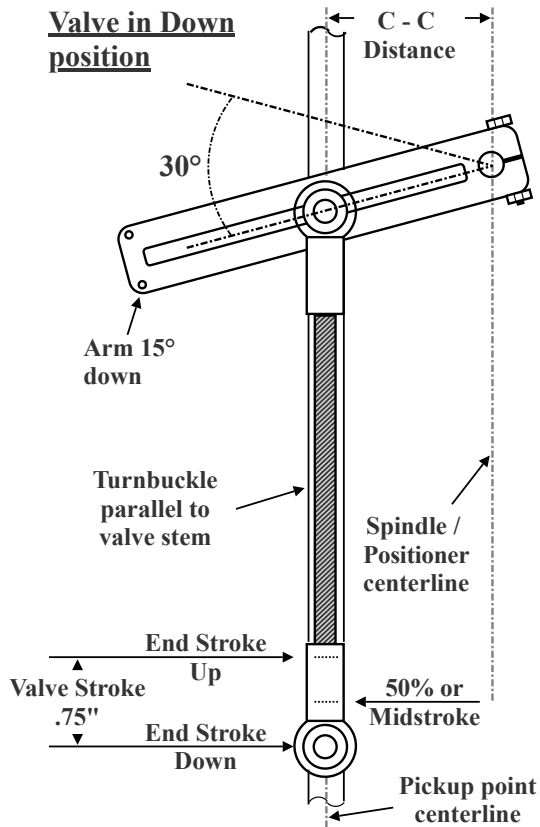

Valve in 50% position

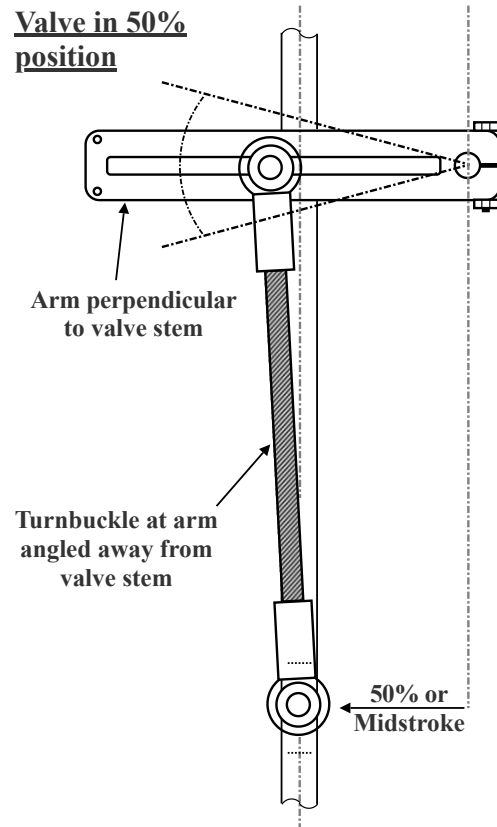

Valve in Up position

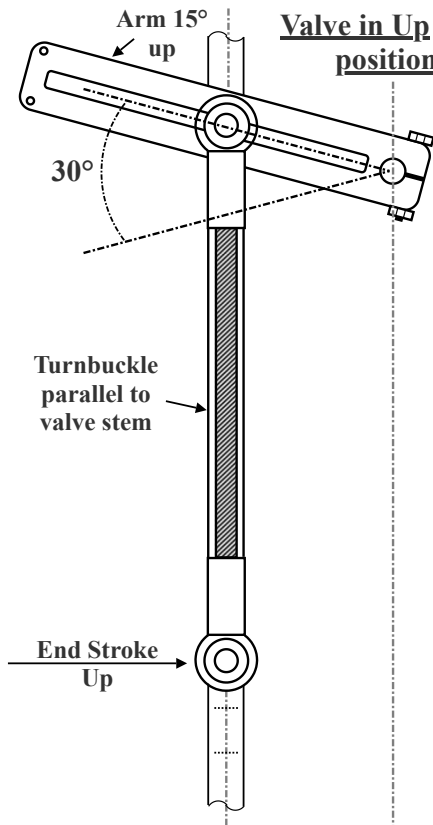

 VALVE ACCESSORIES & CONTROLS, INC.	
Title: Linear Mounting Examples and C-C Formulas	
Author: SK	
Date: 7/22/26	Sheet: 2 of 2
Revision:	